


GFX-490 2V490Ah

The blue transparent case is made of AS imported from Italy. It is resistant to corrosion, retardant to flame, strong and has a nice appearance. The internal structure and status of battery can be observed outside through the transparent case. With the combined application of porous rubber and porous PVC, the separator has a high porosity and good corrosion-resistance, therefore it can absorb more acid to effectively prevent internal short-circuit, and the diffusion of electrolyte is fast to reduce greatly the resistance of battery ensuring sufficient electrolyte when of discharge.



Dimensions and Weight




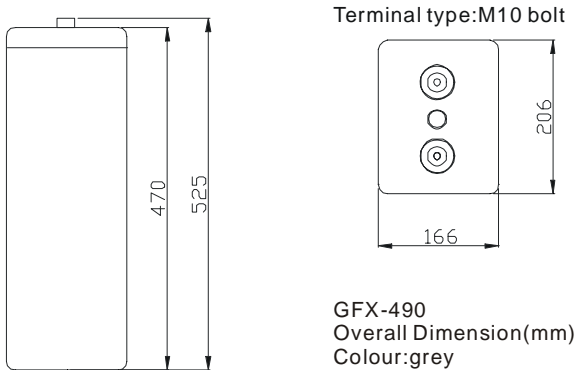


Specifications

Nominal voltage	2V	
Rated capacity (10 hour rate)	490Ah	
Dimension	Length (L)	166mm
	Width (W)	206mm
	Heigh (h)	470mm
	Total height	525mm
Approx. mass (without electrolyte)	27.4Kg	
Approx. mass (with electrolyte)	36.1Kg	

Basic electric performance parameters

	cut-off voltage (V)	Capacit (Ah)
1hour rate	1.67	259
3 hour rate	1.75	367.5
5 hour rate	1.77	420
10 hour rate	1.80	500
24 hour rate	1.85	610
48 hour rate	1.85	656
72 hour rate	1.85	705
96 hour rate	1.85	709
120 hour rate	1.85	715
240 hour rate	1.85	725

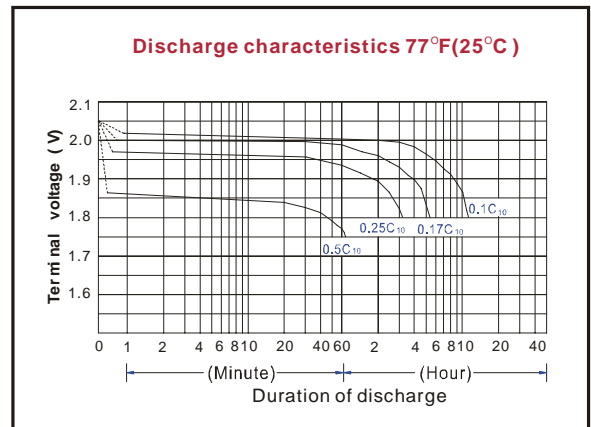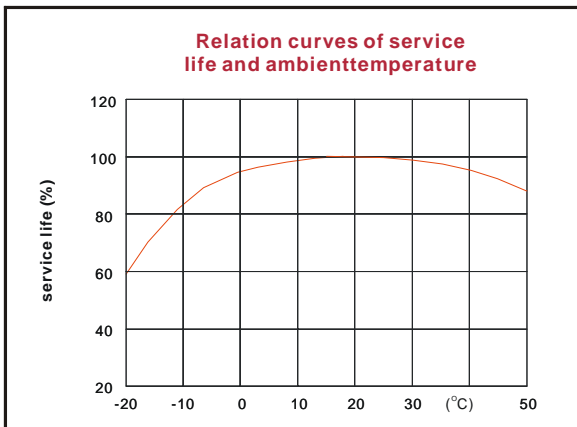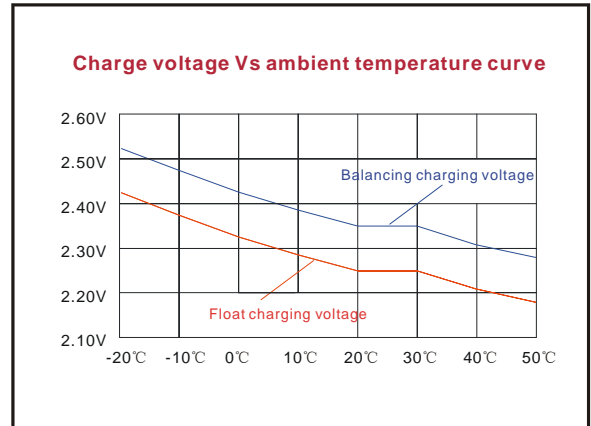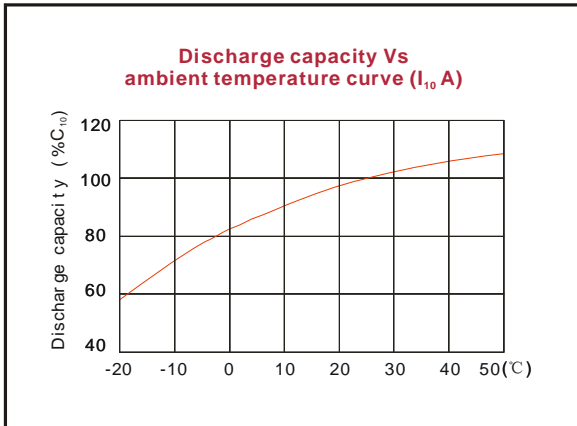

This information is generally descriptive only and is not intended to make or imply any representation, guarantee or warranty with respect to any cells and batteries. Cell and battery designs/specifications are subject to modification without notice. Contact Shenzhen Center Power Tech. Co., Ltd for the latest information.

Shenzhen Center Power Tech. Co., Ltd.
 Center Power Industrial Park, Tongfu Industrial District Dapeng Town,
 518120 Shenzhen, China
 Tel: +86-755-8431 8088 Fax: +86-755-8431 8038
 Email: sales@vision-batt.com

