


## GFX-800 2V800Ah


The blue transparent case is made of AS imported from Italy. It is resistant to corrosion, retardant to flame, strong and has a nice appearance. The internal structure and status of battery can be observed outside through the transparent case. With the combined application of porous rubber and porous PVC, the separator has a high porosity and good corrosion-resistance, therefore it can absorb more acid to effectively prevent internal short-circuit, and the diffusion of electrolyte is fast to reduce greatly the resistance of battery ensuring sufficient electrolyte when of discharge.



### Dimensions and Weight

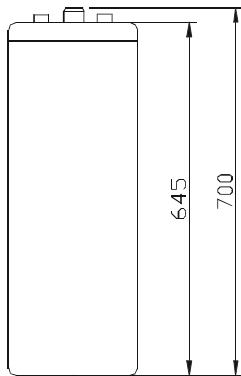

Terminal type:M10 bolt







GFX-800  
Overall Dimension(mm)  
Colour:grey

### Specifications

Nominal voltage	2V	
Rated capacity (10 hour rate)	800Ah	
Dimension	Length (L)	191mm
	Width (W)	210mm
	Heigh ( h )	645mm
	Total height	700mm
Approx. mass (without electrolyte)	45.3Kg	
Approx. mass (with electrolyte)	61.3Kg	

### Basic electric performance parameters

	cut-off voltage (V)	Capacit (Ah)
1hour rate	1.67	416
3 hour rate	1.75	600
5 hour rate	1.77	688
10 hour rate	1.80	800
24 hour rate	1.85	975
48 hour rate	1.85	1072
72 hour rate	1.85	1150
96 hour rate	1.85	1155
120 hour rate	1.85	1160
240 hour rate	1.85	1175

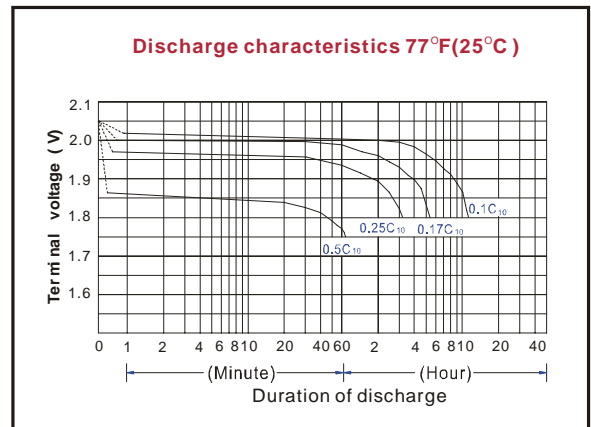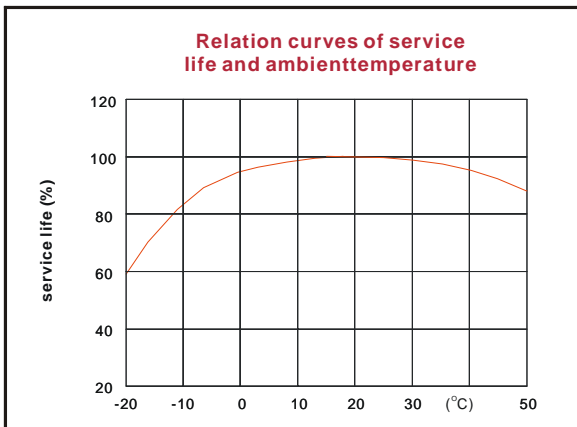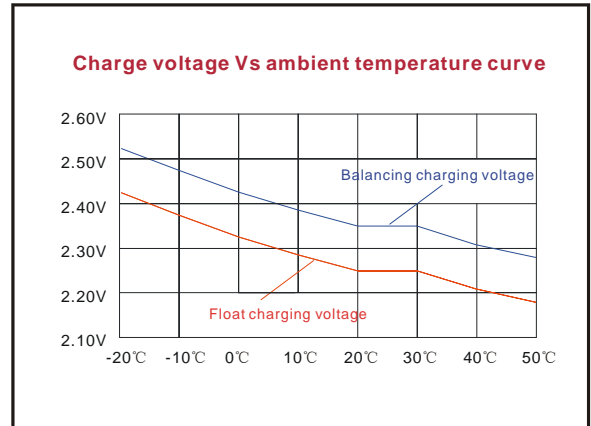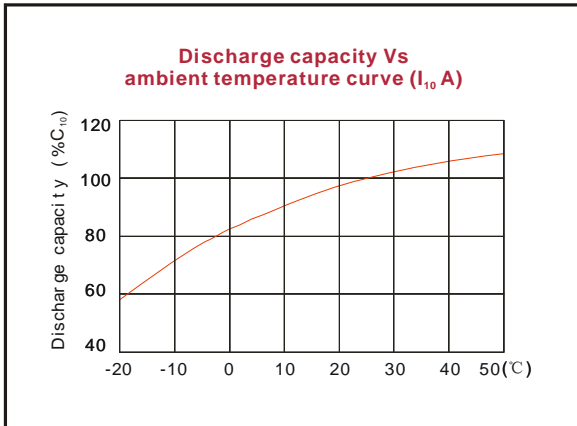

This information is generally descriptive only and is not intended to make or imply any representation, guarantee or warranty with respect to any cells and batteries. Cell and battery designs/specifications are subject to modification without notice. Contact Shenzhen Center Power Tech. Co., Ltd for the latest information.

**Shenzhen Center Power Tech. Co., Ltd.**  
 Center Power Industrial Park, Tongfu Industrial District Dapeng Town,  
 518120 Shenzhen, China  
 Tel: +86-755-8431 8088 Fax: +86-755-8431 8038  
 Email: sales@vision-batt.com

