

Overview

The rechargeable batteries are lead-lead dioxide systems. The dilute sulfuric acid electrolyte is absorbed by separators and plates and thus immobilized. Should the battery be accidentally overcharged producing hydrogen and oxygen, special oneway valves allow the gases to escape thus avoiding excessive pressure build-up. Otherwise, the battery is completely sealed and is, therefore, maintenance-free, leak proof and usable in any position.



Battery Construction

Component	Positive plate	Negative plate	Container	Cover	Safety valve	Terminal	Separator	Electrolyte
Raw material	Lead dioxide	Lead	ABS	ABS	Rubber	Copper	Fiberglass	Sulfuric acid

General Features

- Positive and negative plates in lead-calcium-tin alloy;
- Stable Quality&High Reliability;
- Sealed Construction;
- Long Service Life;
- Maintenance-Free Operation;
- Low Pressure Venting System;
- Low Self Discharge;
- U.L.Component Recognition;
- Six months shelf life at 20°C;
- Design life 10 years



Battery Specification

Performance Characteristics	
Nominal Voltage	12V
Number of cell	6
Design Life	10 years
Nominal Capacity 77°F(25°C)	
10 hour rate (17.5A, 10.8V)	175Ah
5 hour rate (31.5A, 10.5V)	157.5Ah
1 hour rate (115A, 9.6V)	115Ah
Internal Resistance	
Fully Charged battery 77°F(25°C)	≤4.3 mOhms
Self-Discharge	
3% of capacity declined per month at 20°C(average)	
Operating Temperature Range	
Discharge	-20~60°C
Charge	-10~60°C
Storage	-20~60°C
Max. Discharge Current 77°F(25°C)	1000A(5s)
Short Circuit Current	3430A
Charge Methods: Constant Voltage Charge 77°F(25°C)	
Cycle use	2.40-2.45VPC
Maximum charging current	52.5A
Temperature compensation	-30mV/°C
Standby use	2.20-2.30VPC
Temperature compensation	-20mV/°C

Dimensions and Weight

Length(mm / inch)	530 / 20.9
Width(mm / inch)	209 / 8.23
Height(mm / inch)	215 / 8.46
Total Height(mm / inch)	220 / 9.45
Approx. Weight(Kg / lbs)	55.5 / 485.1

* Weight deviation: ± 5%

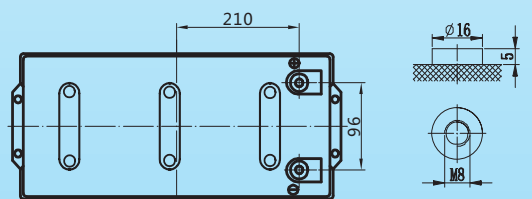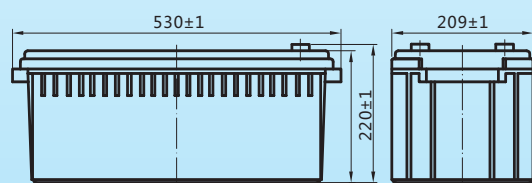

Discharge Constant Current (Amperes at 77°F25°C)

End Point								
Volts/Cell	10min	15min	30min	45min	2h	3h	5h	10h
1.60V	--	324	195	141	67.1	51.1	33.5	18.0
1.65V	--	309	187	137	65.3	49.9	32.7	17.9
1.70V	--	298	183	134	64.1	49.4	32.1	17.7
1.75V	--	280	178	130	62.6	48.4	31.5	17.6
1.80V	--	246	169	125	60.3	46.2	31.0	17.5

Discharge Constant Power (Watts at 77°F25°C)

End Point								
Volts/Cell	10min	15min	30min	45min	2h	3h	5h	10h
1.60V	--	584	368	269	125	96.8	64.2	35.4
1.65V	--	554	347	261	123	95.5	63.1	34.3
1.70V	--	528	341	254	121	94.2	62.2	33.7
1.75V	--	511	333	249	115	91.6	61.2	33.1
1.80V	--	490	327	246	116	89.4	60.2	32.3

(Note)The above characteristics data are average values obtained within three charge/discharge cycles not the minimum values.All data shall be changed without notice,Vision reserves the right to explain and update the information contained hereinto.



VISION GROUP
Shenzhen Center Power
Tech.Co.Ltd.,

6FM175-X

12V 175Ah(10hr)

