



VISION GROUP
Shenzhen Center Power
Tech.Co.Ltd.,

CG12-220PEX

12V 220Ah(10hr)

Overview

Gel battery shows some distinctive advantages over flooded battery or AGM battery, such as super thermal stability, high deep discharge capability, good recovery from deep discharge, even if the battery is left discharged for three days, it will recover to 100% of capacity. With the above-mentioned advantages, the gel battery has long service life, specially suitable for motive power applications, such as golf trailer, srubber, folklift, etc. The deep discharge cycles increased 50% as compared with the AGM battery.

Battery Construction

Component	Positive plate	Negative plate	Container	Cover	Safety valve	Terminal	Separator	Electrolyte
Raw material	Lead dioxide	Lead	ABS	ABS	Rubber	Copper	PE	Gelled acid



General Features

- Nanometer SiO₂ and H₂SO₄ gelled electrolyte technology for efficiency gas recombination of up to 99% and freedom from electrolyte maintenance or water adding
- Not restricted for air transport-complies with IATA/ICAO Special Provision A67.
- Can be mounted in any orientation.
- Computer designed lead, calcium tin alloy grid for high power density.
- Long service life, float or cyclic applications.
- Maintenance-free operation.
- Low self discharge.
- Case and cover available in both standard and flame retardant ABS.

Dimensions and Weight

Length(mm / inch)	521/20.5
Width(mm / inch)	269/ 10.59
Height(mm / inch)	220/ 8.66
Total Height(mm / inch)	227/ 8.94
Approx. Weight(Kg / lbs)	75.5/166.4

* Weight deviation: ± 3%

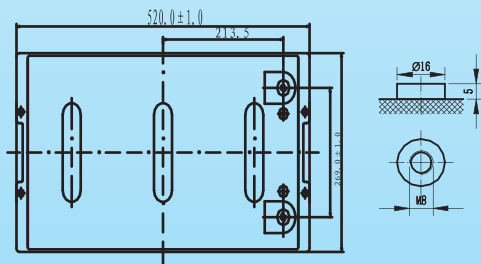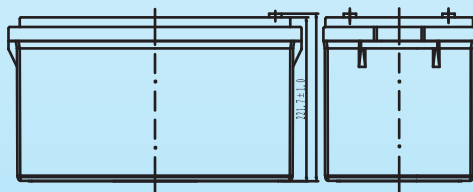

Battery Specification

Performance Characteristics	
Nominal Voltage	12V
Number of cell	6
Design Life	12years
Nominal Capacity 77°F(25°C)	
10 hour rate (22.0A, 10.8V)	220Ah
5 hour rate (39.0A, 10.5V)	195Ah
1 hour rate (140A, 9.6V)	140Ah
Internal Resistance	
Fully Charged battery 77°F(25°C)	≤4.0mOhms
Self-Discharge	
2% of capacity declined per month at 20°C(average)	
Operating Temperature Range	
Discharge	-20~60°C
Charge	-10~60°C
Storage	-20~60°C
Max. Discharge Current 77°F(25°C)	1000A(5s)
Short circuit Current	3000A
Charge Methods: Constant Voltage Charge 77°F(25°C)	
Cycle use	2.35-2.45VPC
Maximum charging current	66.0A
Temperature compensation	-30mV/°C
Standby use	2.20-2.30VPC
Temperature compensation	-20mV/°C

Discharge Constant Current (Amperes at 77°F25°C)

End Point							
Volts/Cell	15min	30min	1h	3h	5h	10h	20h
1.60V	365	224	140	59.6	41.9	22.6	11.8
1.65V	351	222	138	59.2	40.6	22.4	11.6
1.70V	342	219	135	58.8	39.8	22.4	11.5
1.75V	326	216	130	58.1	39.0	22.2	11.4
1.80V	308	210	125	57.0	38.7	22.0	11.3

Discharge Constant Power (Watts at 77°F25°C)

End Point							
Volts/Cell	15min	30min	1h	3h	5h	10h	20h
1.60V	645	426	270	112	80.6	43.7	23.1
1.65V	640	420	259	107	77.3	41.0	22.8
1.70V	624	410	254	104	72.9	41.0	21.9
1.75V	601	401	245	100	68.4	39.7	21.6
1.80V	575	390	241	97	63.8	38.3	21.4

(Note)The above characteristics data are average values obtained within three charge/discharge cycles not the minimum values.All data shall be changed without notice, Vision reserves the right to explain and update the information contained hereinto.



VISION GROUP
Shenzhen Center Power
Tech.Co.Ltd.,

CG12-220PEX

12V 220Ah(10hr)

