

Overview

As professional battery manufacturer, Shenzhen Center Power Tech CO.,Ltd successfully developed new HTB series after years of continued research and development. The new HTB series can work at 35°C for long time, with double lifetime comparing with traditional SLA batteries.

Battery Construction

Component	Positive plate	Negative plate	Container	Cover	Safety valve	Terminal	Separator	Electrolyte
Raw material	Lead dioxide	Lead	Heat-resisting materials		Rubber	Copper	Fiberglass	Gelled acid


General Features

- Wide operating temperature range: -30°C to +80°C;
- Patented anti-corrosion grid technology;
- Special Battery separator technology;
- Special Containers & lids with thermostability;
- Special structure design with compression resistance and impact resistance;
- Save 50% cost of air conditioners' power consumption;
- 100% air conditioner maintenance saving;
- 30% CO2 gas emission reduce;
- 100% condensing agent saving, no condensing agent pollution.

Dimensions and Weight

Length(mm / inch)	558 / 22.0
Width(mm / inch)	125 / 4.92
Height(mm / inch)	317 / 12.5
Total Height(mm / inch)	317 / 12.5
Approx. Weight(Kg / lbs)	58.5 / 129.1

Weight deviation: ± 3%

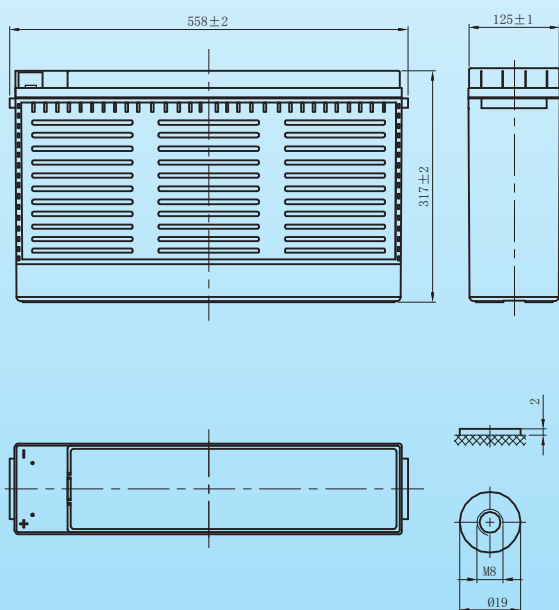

Battery Specification

Performance Characteristics	
Nominal Voltage	12V
Number of cell	6
Design Life	10years
Nominal Capacity 77°F(25°C)	
10 hour rate (18.0A, 10.8V)	180Ah
5 hour rate (32.3A, 10.5V)	161.5Ah
1 hour rate (118A, 9.6V)	118Ah
Internal Resistance	
Fully Charged battery 77°F(25°C)	≤4.0mOhms
Self-Discharge	
3% of capacity declined per month at 20°C (average)	
Operating Temperature Range	
Discharge	-30~80°C
Charge	-10~70°C
Storage	-30~80°C
Max. Discharge Current 77°F(25°C)	1000A(5s)
Short Circuit Current	2700A
Charge Methods: Constant Voltage Charge 77°F(25°C)	
Cycle use	2.40-2.45VPC
Maximum charging current	54A
Temperature compensation	-30mV/°C
Standby use	2.2-2.3VPC
Temperature compensation	-20mV/°C

Discharge Constant Current (Amperes at 77°F25°C)

End Point								
Volts/Cell	10min	15min	30min	45min	1h	3h	5h	10h
1.60V	355	300	197	145	118	51.0	33.0	18.4
1.65V	332	285	192	143	116	50.3	32.8	18.3
1.70V	308	269	187	140	114	49.5	32.6	18.2
1.75V	285	254	181	138	111	48.8	32.3	18.1
1.80V	261	238	176	135	109	48.0	32.1	18.0

Discharge Constant Power (Watts at 68°F20°C)

End Point								
Volts/Cell	10min	15min	30min	45min	1h	2h	3h	5h
1.60V	590	525	360	274	225	134	98.0	64.1
1.65V	566	503	349	268	221	132	97.0	63.6
1.70V	541	480	339	262	217	130	96.0	63.1
1.75V	517	458	328	257	212	127	95.0	62.5
1.80V	492	435	318	251	208	125	94.0	62.0

(Note) The above characteristics data are average values obtained within three charge/discharge cycles not the minimum values. All data shall be changed without notice, Vision reserves the right to explain and update the information contained hereinto.



VISION GROUP
Shenzhen Center Power
Tech.Co.Ltd.,

CT12-180X-HTB

12V 180Ah(10hr)

